



EP341

Product name

Earth Positive® Sweat Shorts

Fibres composition / Yarn type

100% Organic Cotton Compact Spun

Fabric type / Weight

3-ply french terry brushed 300 g/m²

Commodity code

6112 1100 00

Origin

India


Available sizes

XS S M L XL 2XL

Certifications



Available colours

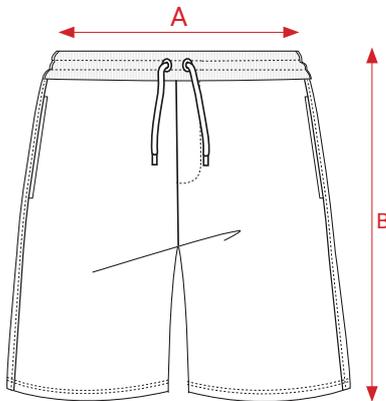

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	34	13½	52	20½
S	37	14½	55	21½
M	40	15¾	58	22¾
L	43	17	59	23¼
XL	46	18	60	23½
2XL	49	19¼	60	23½

Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Sueded colours

		Very Good	Moderate	Not Suitable
	Sueded Black SUBL	✓		
	Sueded Black Heather SUBLHE		✓	
	Sueded Light Blue Heather SULBHE		✓	
	Sueded Light Heather SULHE		✓	
	Sueded Light Beige SUSA	✓		
	Sueded Navy SUNA	✓		

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min