



EP305

Product name

Earth Positive® Mock Neck Sweatshirt

Fibre composition / Yarn type

100% Organic Cotton Compact Spun

Fabric type / Weight

Brushed Fleece 3-ply 8.9 oz/yd² 300 g/m²

Commodity code

6110 2091 00

Origin

India

Available sizes

S M L XL 2XL

Certifications




Available colours



Black
BL

Sueded
Black
SUPL

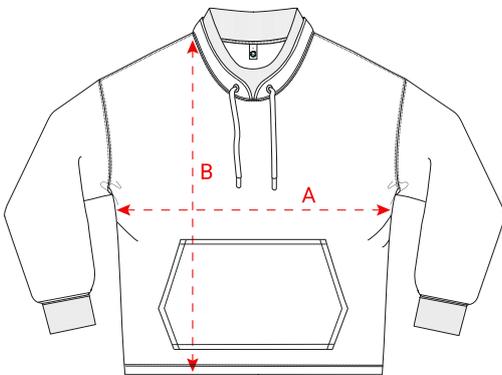

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
S	55	21½	68	26¾
M	58	22¾	71	28
L	61	24	73	28¾
XL	64	25¼	75	29½
2XL	67	26¼	76	30

EARTH POSITIVE



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

	Very Good	Moderate	Not Suitable
 Black BL	✓		

Sueded colours

	Very Good	Moderate	Not Suitable
 Sueded Black SUBL	✓		

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton solid colours (excluding RFD & Sueded colours)	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min