



EP319

Product name
Earth Positive® Women's Crewneck Sweatshirt

Fibre composition / Yarn type
100% Organic Cotton Compact Spun

Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code **Origin**
6110 2099 00 India

Available sizes
XS S M L XL 2XL

Certifications

Available colours

Black
BL


White
WH

Baby Pink
BP

Fawn
FA

Light
Heather
LHE

Slate Green
SLGR

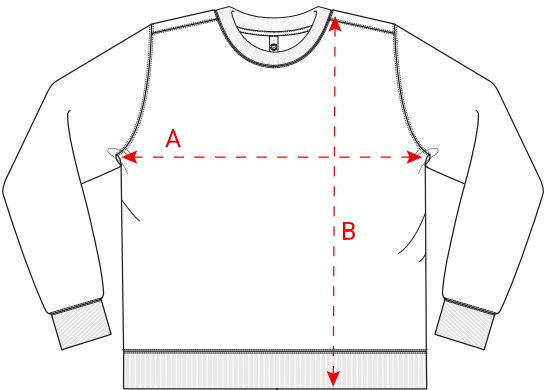

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	46.5	18¼	60	23¼
S	49	19¼	62	24
M	51.5	20¼	63.5	24½
L	54	21¼	65	25¼
XL	56.5	22¼	66.5	25¾
2XL	59	23¼	66.5	26



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

		Very Good	Moderate	Not Suitable
	Black BL	✓		
		White WH	✓	

Solid colours

		Very Good	Moderate	Not Suitable
   	Baby Pink BP	✓		
	Fawn FA			✓
	Light Heather LHE		✓	
	Slate Green SLGR		✓	



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min