



EP345

Product name
Earth Positive® Sweatpants with Zips

Fibre composition / Yarn type
100% Organic Cotton Compact Spun

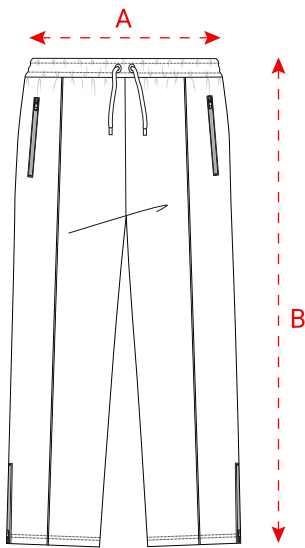
Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code Origin
6112 1100 00 India

Available sizes
XS S M L XL 2XL

Certifications

Available colours








Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	34	13½	104	41
S	37	14½	105	41¼
M	40	15¾	106	41¾
L	43	17	107	42
XL	46	18	108	42½
2XL	49	19¾	109	42¾



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours								
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable			
<div>Black BL</div>		✓			<div>Black Heather BLHE</div> <div>Dark Heather DHE</div> <div>Light Blue Heather LBHE</div> <div>Light Heather LHE</div>		✓				✓	
							✓					
							✓					
							✓					



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min