



EP347

Product name
Earth Positive® Women's Flared Leg Sweatpants

Fibre composition / Yarn type
100% Organic Cotton Compact Spun

Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code Origin
6112 1100 00 India

Available sizes
XS S M L XL 2XL

Certifications


Available colours

Black
BL

Off White
WM

Light Heather
LHE

Baby Pink
BP

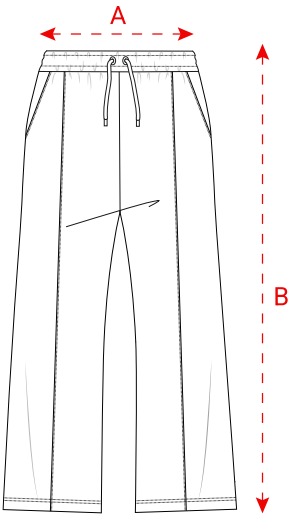





Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	31	12¼	104	41
S	34	13½	105	41¼
M	37	14½	106	41¾
L	40	15¾	107	42¼
XL	43	17	108	42½
2XL	46	18	108	42½



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours					
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
 Black BL	✓			 Off White WM	✓				
				 Light Heather LHE		✓			
				 Baby Pink BP	✓				



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min