



EP348

Product name
Earth Positive® Women's Barrel Sweatpants

Fibre composition / Yarn type
100% Organic Cotton Compact Spun


Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code Origin
6112 1100 00 India

Available sizes
XS S M L XL 2XL

Certifications

Available colours

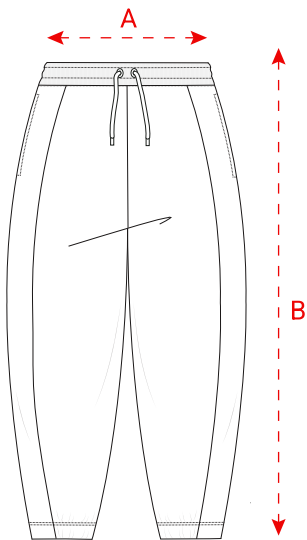

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	31	12¼	98	38½
S	34	13½	99	39
M	37	14½	100	39½
L	40	15¾	101	39¾
XL	43	17	102	40¼
2XL	46	18	103	40½

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------

Black

BL

✓

Solid colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------

Light Heather

LHE

Fawn

FA

✓



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min