



EP309

Product name
Earth Positive® Sleeveless Full Zip Hoodie

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
Brushed Fleece 3-ply 8.9 oz/yd² 300 g/m²

Commodity code **Origin**
6110 2091 00 India

Available sizes
XS S M L XL 2XL

Certifications



Available colours



Black
BL



Black
Heateher
BLHE




Light
Heather
LHE



Dark
Heateher
DHE



Light Blue
Heather
LBHE

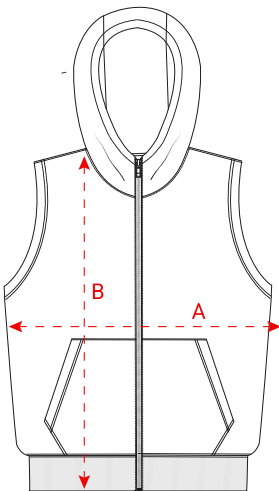

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	49	19¼	65	25½
S	52	20½	68	26¾
M	55	21½	71	28
L	58	22¾	73	28¾
XL	61	24	75	29½
2XL	64	25¼	76	30
3XL	67	26½	76	30



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

		Very Good	Moderate	Not Suitable
	Black BL	✓		
	Black Heather BLHE		✓	
	Light Heather LHE		✓	
	Dark Heather DHE		✓	
	Light Blue Heather LBHE		✓	



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton solid colours (excluding RFD & Sueded colours)	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min