




Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	52	20½	60.5	23¾
S	55	21½	62	24½
M	58	22¾	63.5	25
L	61	24	65.5	25¾
XL	64	27½	67.5	26½
2XL	67	26¾	68.5	27

{ **PTA-APPROVED**
VEGAN

Sueded
Pale Lem
SUPLE

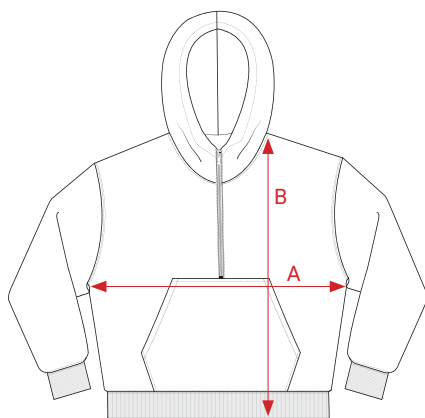



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Sueded colours

		Very Good	Moderate	Not Suitable
	Sueded Black SUBL	✓		
	Sueded Black Heather SUBLHE		✓	
	Sueded Light Blue Heather SULBHE		✓	
	Sueded Off White SUWM	✓		
	Sueded Light Heather SULHE		✓	
	Sueded Fawn SUFA	✓		
	Sueded Pale Lemon SUPLE		✓	
	Sueded Oragne SUOR		✓	
	Sueded Miami Pink SUPR	✓		
	Sueded Slate Green SUSLGR		✓	
	Sueded Bamboo Green SUBGR		✓	
	Sueded Blue Dusk SUBD		✓	



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min