



EP345

Product name
Earth Positive® Sweatpants with Zips

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code **Origin**
6112 1100 00 India

Available sizes
XS S M L XL 2XL

Certifications



Available colours

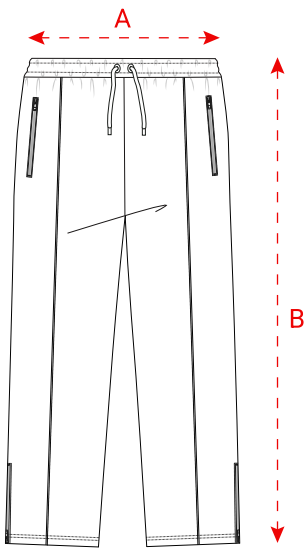

Black
BL


Black
Heather
BLHE


Dark
Heather
DHE


Light Blue
Heather
LBHE


Light
Heather
LHE



Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	34	13½	104	41
S	37	14½	105	41¼
M	40	15¾	106	41¾
L	43	17	107	42
XL	46	18	108	42½
2XL	49	19¼	109	42¾



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours					
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
Black BL		✓			Black Heather BLHE		✓		
							✓		
							✓		
							✓		



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min