



EP346

Product name

Earth Positive® Men's Barrel Pants

Fibre composition / Yarn type

100% Organic Cotton Compact Spun

Fabric type / Weight

3-ply french terry brushed 300 g/m²

Commodity code

6112 1100 00

Origin

India


Available sizes

XS S M L XL 2XL 3XL

Certifications



Available colours

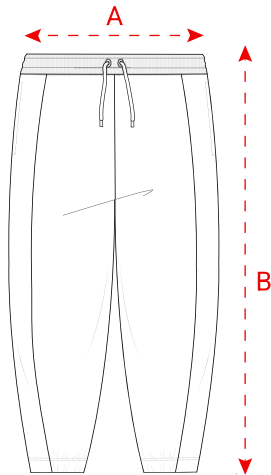

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	34	13½	99	39
S	37	14½	100	39½
M	40	15¾	101	39¾
L	43	17	102	40¼
XL	46	18	103	40½
2XL	49	19¼	104	41
3XL	52	20½	104	41

EARTH POSITIVE




Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------



✓		
---	--	--

Solid colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------



	✓	
--	---	--



	✓	
--	---	--



	✓	
--	---	--



✓		
---	--	--

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min