



EP348

Product name
Earth Positive® Women's Barrel Sweatpants

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code Origin
6112 1100 00 India

Available sizes
XS S M L XL 2XL

Certifications

Available colours


Black
BL

Light
Heather
LHE

Fawn
FA

Miami Pink
PR

Blue Dusk
BD

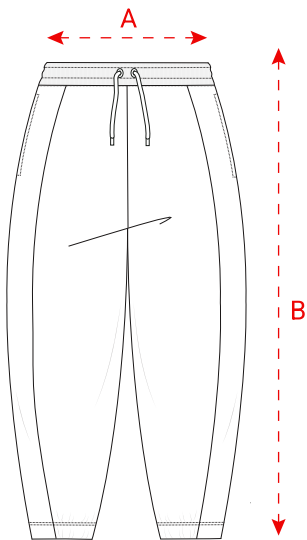

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	31	12¼	98	38½
S	34	13½	99	39
M	37	14½	100	39½
L	40	15¾	101	39¾
XL	43	17	102	40¼
2XL	46	18	103	40½



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours					
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
 Black BL	✓			 Light Heather LHE		✓			
				 Fawn FA			✓		
				 Miami Pink PR	✓				
				 Blue Dusk BD	✓				

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min