



EP349

Product name
Earth Positive® Women's Shorts

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
3-ply french terry brushed 300 g/m²

Commodity code Origin
6112 1100 00 India

Available sizes
XXS XS S M L XL 2XL

Certifications



Available colours

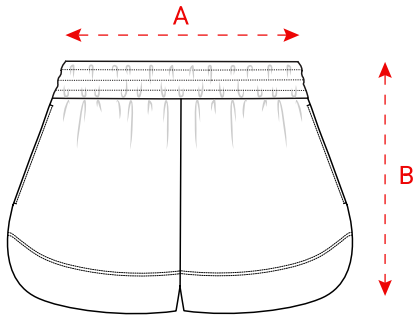

Black
BL


Off White
WM


Light
Heather
LHE


Baby Pink
BP


Fawn
FA



Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
2XS	25	9¾	32	12½
XS	28	11	33	13
S	31	12¼	34	13½
M	34	13½	35	13¾
L	37	14½	36	14¼
XL	40	15¾	37	14½
2XL	43	17	37	14½



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours					
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
 Black BL		✓			 Off White WM	✓			
					 Light Heather LHE		✓		
					 Baby Pink BP	✓			
					 Fawn FA			✓	



Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min