



EP312

Product name
Earth Positive® Short Sleeve Sweatshirt

Fibre composition / Yarn type
100% GOTS Organic Cotton Compact Spun

Fabric type / Weight
Brushed Fleece 3-ply 8.9 oz/yd² 300 g/m²

Commodity code Origin
6110 2091 00 India

Available sizes
XS S M L XL 2XL 3XL

Certifications



Available colours



Black
BL



Dark Navy
NA



Black
Heather
BLHE




Light Blue
Heather
LBHE



Light
Heather
LHE



Dark
Heather
DHE

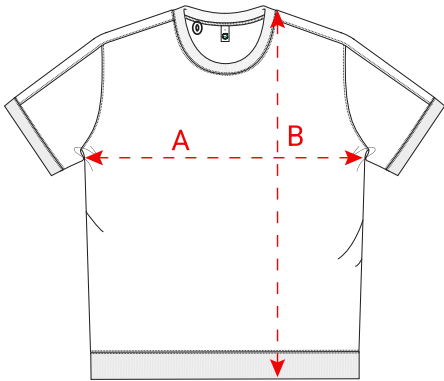

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	49	18¾	67	26½
S	52	20½	70	27½
M	55	21½	72	28¼
L	58	22¾	74	29
XL	61	24	75	39½
2XL	64	25¼	76	30
3XL	67	26½	76	30



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours				Solid colours					
		Very Good	Moderate	Not Suitable			Very Good	Moderate	Not Suitable
	Black BL	✓				Dark Navy NA	✓		
						Black Heather BLHE		✓	
						Light Blue Heather LBHE		✓	
						Light Heather LHE		✓	
						Dark Heather DHE		✓	

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton solid colours (excluding RFD & Sueded colours)	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our dscharge printing reccommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our dscharge printing reccommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min