



EP319

Product name

Earth Positive® Women's Crewneck Sweatshirt

Fibre composition / Yarn type

100% GOTS Organic Cotton Compact Spun

Fabric type / Weight

3-ply french terry brushed 300 g/m²

Commodity code

6110 2099 00

Origin

India


Available sizes

XS S M L XL 2XL

Certifications



Available colours

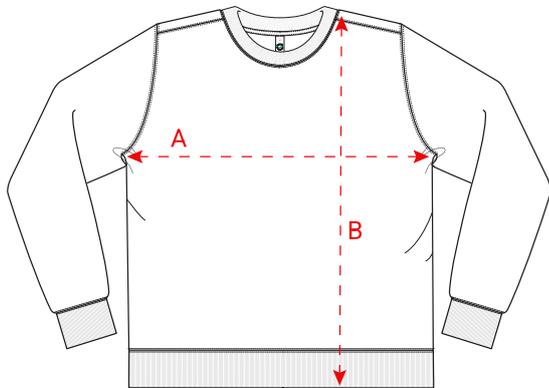

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	46.5	18¼	60	23¼
S	49	19¼	62	24
M	51.5	20¼	63.5	24½
L	54	21¼	65	25¼
XL	56.5	22¼	66.5	25¾
2XL	59	23¼	66.5	26

EARTH POSITIVE



Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

		Very Good	Moderate	Not Suitable
	Black BL	✓		
	White WH	✓		

Solid colours

		Very Good	Moderate	Not Suitable
	Baby Pink BP	✓		
	Fawn FA			✓
	Light Heather LHE		✓	
	Slate Green SLGR		✓	

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min