



## EP346

### Product name

Earth Positive® Men's Barrel Pants

### Fibre composition / Yarn type

100% GOTS Organic Cotton Compact Spun

### Fabric type / Weight

3-ply french terry brushed 300 g/m<sup>2</sup>

### Commodity code

6112 1100 00

### Origin

India


### Available sizes

XS S M L XL 2XL 3XL

### Certifications



### Available colours

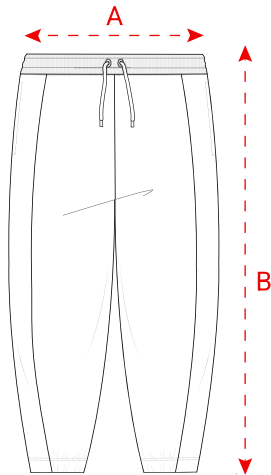

### Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
XS	34	13½	99	39
S	37	14½	100	39½
M	40	15¾	101	39¾
L	43	17	102	40¼
XL	46	18	103	40½
2XL	49	19¼	104	41
3XL	52	20½	104	41

# EARTH POSITIVE




## Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

### Core colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------



✓		
---	--	--

### Solid colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------



	✓	
--	---	--



	✓	
--	---	--



	✓	
--	---	--



✓		
---	--	--

## Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

**\*Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi  
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

**\*Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi  
Curing 180°C / 1 min