



EP349

Product name

Earth Positive® Women's Shorts

Fibre composition / Yarn type

100% GOTS Organic Cotton Compact Spun

Fabric type / Weight

3-ply french terry brushed 300 g/m²

Commodity code

6112 1100 00

Origin

India


Available sizes

XXS XS S M L XL 2XL

Certifications



Available colours

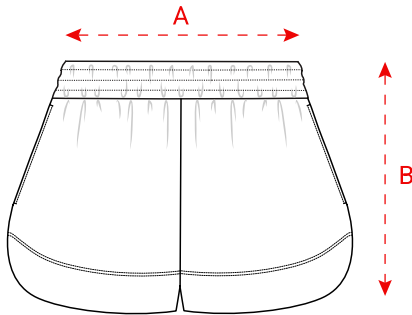

Size spec

Size	Width (A)		Length (B)	
	cm	inch	cm	inch
2XS	25	9¾	32	12½
XS	28	11	33	13
S	31	12¼	34	13½
M	34	13½	35	13¾
L	37	14½	36	14¼
XL	40	15¾	37	14½
2XL	43	17	37	14¾

Discharge printing suitability

Important: This guide serves as a general reference, and results may vary. We strongly recommend testing prior to production.

Core colours

Very Good	Moderate	Not Suitable
-----------	----------	--------------



✓		
---	--	--

Solid colours


Very Good	Moderate	Not Suitable
-----------	----------	--------------




✓		
---	--	--



	✓	
--	---	--



✓		
---	--	--



		✓
--	--	---

Printing Guide

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Sueded Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★★	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min

Print type	Print type	Printing suitability 0 = Not Suitable, 1 = Poor, 2 = Moderate, 3 = Good, 4 = Very Good, 5 = Excellent	Printing recommendations
Fleece 100% Organic Cotton Heather Colours	Screen print	★★★★★	Follow manufacturer's recommendations for printing and curing settings.
	Discharge	★★★★☆	The results may vary from one colour to another. Refer to our discharge printing recommendations on the following page.
	Transfer (Sticker)	★★★★☆	Follow manufacturer's recommendations for curing settings.
	Direct to garment	★★★★☆	Follow manufacturer's recommendations for printing and curing settings.
	Embroidery	★★★★★	Direct embroidery, stitched patch, labels

***Maximum heat recommendation for back neck label** Fusing 180°C / 3-6 sec, 6 psi
Curing 180°C / 1 min